



Trex® Protect™
JOIST & BEARER TAPE



Trex® Protect™
JOIST & BEARER TAPE

Imported into Australia by:



Visit or call
1300 01 DECK
www.deckingsolutions.com.au

trexprotect.com/au

To calculate what you need, visit our materials estimator at:
trexprotect.com/au/materials-estimator

© 2022 Trex Company, Inc. All rights reserved. Trex® RainEscape® products are manufactured and sold by IBP, LLC under a Trademark License Agreement with Trex Company, Inc. RainEscape® is a federally registered trademark of IBP, LLC.

EXTEND THE LIFE
of your deck

Protect your
deck from
moisture with

TREX® PROTECT®


JOIST & BEARER TAPE



Trex Protect is a non-skid, self-adhesive deck flashing tape that is designed to protect the top of joists and bearers from moisture that can lead to timber rot and decay and the loosening of deck screws.

BENEFITS

- » Protects all horizontal and vertical surfaces including joists, rim joists, bearers, steps, stair stringers, blocking, ledger board and other surfaces
- » Helps deck screws hold longer and stronger
- » Acts as a barrier between timber and galvanized metal such as joist hangers
- » Seals deck fasteners and prevents moisture penetration
- » Eliminates splitting from freeze and thaw
- » Provides a non-skid surface for safe installation

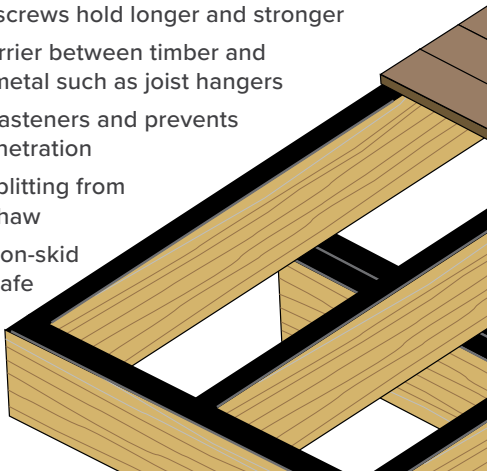

INSTALLATION

Trex Protect Joist and Bearer Tape can be applied to horizontal and vertical surfaces.

Trex Protect Tape has two widths making it convenient to apply to joists and double bearers.

- » Use 50 mm x 20 m Joist Tape for joists
- » Use 100 mm x 20 m Bearer Tape for double bearers

- 1 CLEAN THE TIMBER SURFACE
MAKING SURE IT IS DRY
AND FREE OF ANY DEBRIS



- 2 REMOVE THE BUTYL TAPE BACKING WHILE
APPLYING DIRECTLY TO THE SURFACE. RUN
YOUR HAND OVER THE TAPE AND FIRMLY
PRESS IT ON TO THE TIMBER SURFACE.



- 3 AFTER COVERING ALL HORIZONTAL
AND VERTICAL SURFACES, CUT THE
TAPE TO LENGTH WITH A UTILITY
KNIFE OR SCISSORS

